


## EPM-1601

### mPCIe to 4 -RS-232 Module

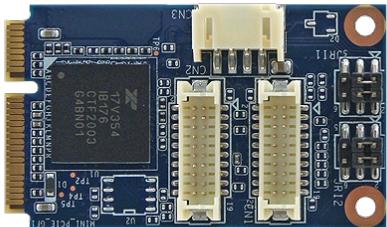

- > Input Interface PCI-Express. 2.0
- > Output Interface 4x RS-232
- > Industrial temperature (W/T temp. -40 °C to 85°C) operation
- > Support Ring Wake function (optional)

#### Spec

##### I/O

Input Interface	PCI-Express. 2.0
Output Interface	4x RS-232

##### Software Support

OS	Windows 7/10 and Linux
----	------------------------

##### Power Requirement

Power Consumption	3.3V±5%
-------------------	---------

##### Mechanical & Environmental

Operating Temperature	-40~+85°C
Storage Temperature	-55~+95°C
Vibration Test	5G @5~500Hz
Shock Test	10G @ 11ms
Dimension	50.9mm*30mm
Form-Factor	mPCIe

##### Ordering Information

Ordering Information	Standard Ordering PN: -EPM-1601-A1R  Accessories List: -2 pair DB-9 connectors cable
----------------------	--