




## EPM-1603

### USB to 4-RS-232/422/485 Module

- > Input Interface USB2.0
- > 3 x RS232/422/485 functions with DB9 connector, 1 x RS232/422/485 with pin header
- > Support Ring Wake on S3, S4
- > Industrial temperature (WT temp. -40 to 85) operation

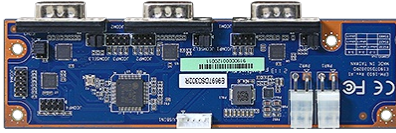

**+** Spec

I/O	
<b>Input Interface</b>	1x USB2.0
<b>Output Interface</b>	4x RS-232/422/485
Software Support	
<b>OS</b>	Windows 7/10 and Linux
Power Requirement	
<b>Power Consumption</b>	1.69W (26Vx65mA)
Mechanical & Environmental	
<b>Operating Temperature</b>	-40~+85°C
<b>Storage Temperature</b>	-55~+95°C
<b>Vibration Test</b>	5G @5~500Hz
<b>Shock Test</b>	10G @ 11ms
<b>Dimension</b>	142 mm x 40 mm