




## ESM-SKLH

6th Gen Intel Core™ Processor i7/i5/i3  
Type6 COMe Basic Module with Intel® QM170  
Chipset

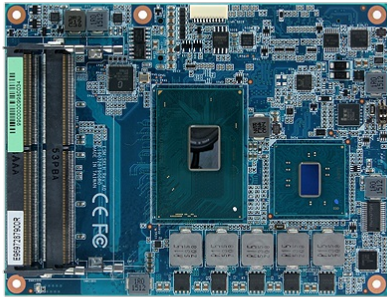

- > Onboard 6th Gen Intel® Core™ i7/i5/i3 Processor
- > Two 260-pin SODIMM DDR4 SDRAM slot up to 32GB
- > Dual-channel 18/24-bit LVDS, VGA, DP/HDMI/DVI, eDP Option
- > Intel® I219LM Gigabit Ethernet
- > 8 PCIe x1, 1 PCIe x16, 4 SATA, 8 USB 2.0, 4 USB 3.0
- > HD Audio Interface
- > Type 6 Rev 2.1 Pin-out
- > TPM 2.0

### + Spec

-System Information-	
<b>Processor</b>	6th Gen Intel® Core™ i7-6820EQ 4-Core 2.8GHz processor 6th Gen Intel® Core™ i5-6440EQ 4-Core 2.7GHz processor 6th Gen Intel® Core™ i3-6102E 2-Core 1.9GHz processor
<b>Platform Controller Hub</b>	Intel QM170
<b>System Memory</b>	2 x 260-Pin DDR4 SO-DIMM up to 32 GB
<b>I/O Chipset</b>	EC ITE IT8528E
<b>BIOS Information</b>	AMI uEFI BIOS, 128Mbit SPI Flash ROM
Expansion	
<b>Expansion</b>	8 x PCIe x1
I/O	
<b>USB Port</b>	8 x USB 2.0 4 x USB 3.0
<b>COM Port</b>	2 x UART
<b>SATA</b>	4 x SATA III
<b>DIO</b>	1 x 8bit GPIO
<b>MIO</b>	1 x SMBus 1 x LPC 1 x I2C
Display	
<b>Graphic Chipset</b>	Intel® Skylake SoC integrated Graphics
<b>Spec. &amp; Resolution</b>	VGA: Max. resolution 1920x1080 @ 60Hz LVDS: Max. resolution 1920x1080 @ 60Hz HDMI: Max. resolution 4096x2304 @ 24Hz (HDMI Max resolution only one display output)
<b>Multiple Display</b>	(VGA + DP) + HDMI + DDI LVDS + (VGA + DP) + DDI LVDS + (VGA + DP) + HDMI LVDS + HDMI + DDI
<b>LVDS</b>	CH7511B(eDP to LVDS)
<b>DDI</b>	HDMI DVI DisplayPort
Audio	
<b>Audio Interface</b>	Intel® High Definition Audio
Certifications	
<b>Certification Information</b>	CE FCC Class B
Ethernet	
<b>LAN Chipset</b>	1 x Intel® I219LM
<b>Ethernet Interface</b>	10/100/1000 Base-Tx GbE compatible
Mechanical & Environmental	
<b>Operating Temperature</b>	0°C ~ 60°C (32°F ~ 140°F)
<b>Storage Temperature</b>	-40°C ~ 75°C (-40°F ~ 167°F)
<b>Operating Humidity</b>	40°C @ 95% Relative Humidity, Non-condensing
<b>Weight</b>	0.44lbs(0.2kg)
<b>Power Requirement</b>	+9V ~ +19V
<b>ACPI</b>	Single Power ATX Support S0, S3, S4, S5 ACPI 3.0 Compliant
<b>Power Mode</b>	AT/ATX
<b>Dimension (L x W)</b>	5" x 3.7" (125mm x 95mm)
Software Support	



<b>OS Information</b>	Win 10 Win 8.1 Win 7 Linux
<b>Ordering Information</b>	
<b>Ordering Information</b>	<p>ESM-SKLH-6820-A1R Intel® Core™ i7-6820EQ Type6 COMe Basic Module</p> <p>ESM-SKLH-6440-A1R Intel® Core™ i5-6440EQ Type6 COMe Basic Module</p> <p>ESM-SKLH-6102-A1R Intel® Core™ i3-6102E Type6 COMe Basic Module</p> <p>EEV-EX14-B1R mATX Ev. Board for COMe Type 6 A1.1</p> <p>ACC-ESMSKLH-CL-1R Cooler for ESM-SKLH/ESM-SKLA W/FAN H=43.5mm</p> <p>ACC-ESMKBLH-SD-1R Heatspreader W/O FAN H=8.0mm (for ESM-KBLH/ESM-KBLA/ESM-SKLH/ESM-SKLA)</p>