


HPM-ERSUA

Single 4th/5th Generation Intel®Xeon® Scalable Processor ATX Server Board with Intel® C741 Chipset and IPMI2.0. Processor supports up to 270W TDP

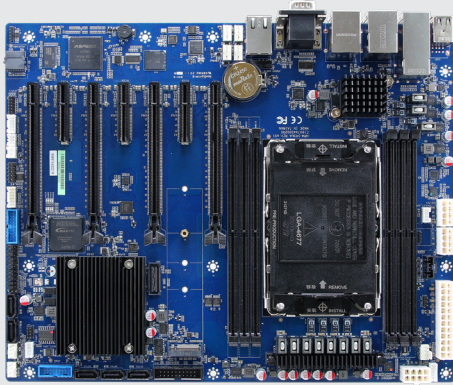

Features

- Intel LGA4677 Socket supports 4th/5th Generation Intel® Xeon® Scalable Processor (Max. TDP at 270W)
- Intel® C741 Chipset
- 6 x DDR5 5600 MHz RDIMM up to 1.5TB
- TPM 2.0 onboard
- IPMI 2.0 with AST 2600 BMC controller onboard
- 1 x Intel I210AT 1GbE controller
1 x Intel I226-LM 2.5GbE controller
1 x Intel X550AT2 10GbE controller supports 2 x 10GbE Ethernet ports
- 5 x SATA III Support RAID 0,1,5,10
- 1 x RS232 port
- 4 x USB 3.2 Gen1 ports & 2 x USB 2.0 ports at Edge I/O
4 x Internal USB 3.2 Gen1 ports
- 1 x M.2 M-Key PCIe 3.0 x4 NVMe SSD, 2242/2260/2280/22110 form factor



4th/5th Gen. Intel®Xeon® Scalable Processor



6 x DDR5 RDIMM 5600MHz



IPMI 2.0 Supported



10GbE



PCIe Gen5 Multiple Expansion

Specifications

System Information

Processor	Intel LGA4677 Socket supports 4th/5th Generation Intel® Xeon® Scalable Processor (Max. TDP at 270W)
Platform Controller Hub	Intel® C741 Chipset
System Memory	6 x DDR5 5600 MHz RDIMM up to 1.5TB
Watchdog Timer	System reset event 0 ~ 6553 seconds
BIOS	AMI UEFI BIOS
H/W Status Monitor	CPU temperature Fan speed and voltage monitoring Fan speed control Case open detection
TPM	TPM 2.0 onboard
IPMI	IPMI 2.0 with AST 2600 BMC controller onboard

Rear I/O

USB	4 x USB 3.2 Gen1 ports 2 x USB 2.0 ports
COM Port	1 x RS232 port
RJ-45	5 x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shared with IPMI access LAN2 port for 2.5GbE LAN3 and 4 ports for 10GbE
VGA	1 x VGA port

Display

Graphic Chipset	AST2600 BMC controller
Resolution	1 x VGA port VGA: 1920 x 1200 @ 60Hz 32bpp

Expansion

Expansion	4 x PCIe Gen5 x16 slots and 3 x PCIe Gen5 x4 slots Slot 1, PCIe 5.0 x16 Slot 2, PCIe 5.0 x4 Slot 3, PCIe 5.0 x16 Slot 4, PCIe 5.0 x4 Slot 5, PCIe 5.0 x16 Slot 6, PCIe 5.0 x4 Slot 7, PCIe 5.0 x16 (Slot 7 is the slot closest to CPU)
-----------	---

Storage

M.2	1 x M.2 M-Key PCIe 3.0 x4 NVMe SSD, 2242/2260/2280/22110 form factor
-----	--

I/O

USB	4 x Internal USB 3.2 Gen1 ports
SATA	5 x SATA III (Note:SATA 1~4 support RAID 0,1,5,10)
Serial	1 x Internal RS232 port
CMOS Battery	1 x Horizontal Socket Type CMOS Battery Holder with CR2450
Ethernet	
LAN Chipset	1 x Intel I210AT 1GbE controller 1 x Intel I226-LM 2.5GbE controller 1 x Intel X550AT2 10GbE controller supports 2 x 10GbE Ethernet ports
LAN Port	5 x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shared with IPMI access LAN2 port for 2.5GbE LAN3 and 4 ports for 10GbE

Mechanical & Environmental

Operating Temp.	0 ~ 55°C (32 ~ 131°F)to support up to 250W TDP CPU 0 ~ 45°C (32 ~ 113°F)to support up to 270W TDP CPU
Storage Temp.	-40 ~ 85°C
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Weight	1.19KG
Power Connector	1 x Std. 24 Pin ATX connector 3 x 8 Pin SSI 12V connectors
Dimension (L x W)	12" x 9.6" (304.8mm x 243.84mm), PCB thickness is 2.54mm


Software Support

OS	Windows 10 IoT Enterprise LTSC 2021 Windows 11 Windows Server 2019 Windows Server 2022 Ubuntu 21.1, 22.04 LTS or later Red Hat Enterprise Linux(RHEL) 8.2 and later
----	--

HPM-ERSUA

Single 4th/5th Generation Intel®Xeon® Scalable Processor
ATX Server Board with Intel® C741 Chipset and IPMI2.0.
Processor supports up to 270W TDP

Mechanical Drawing

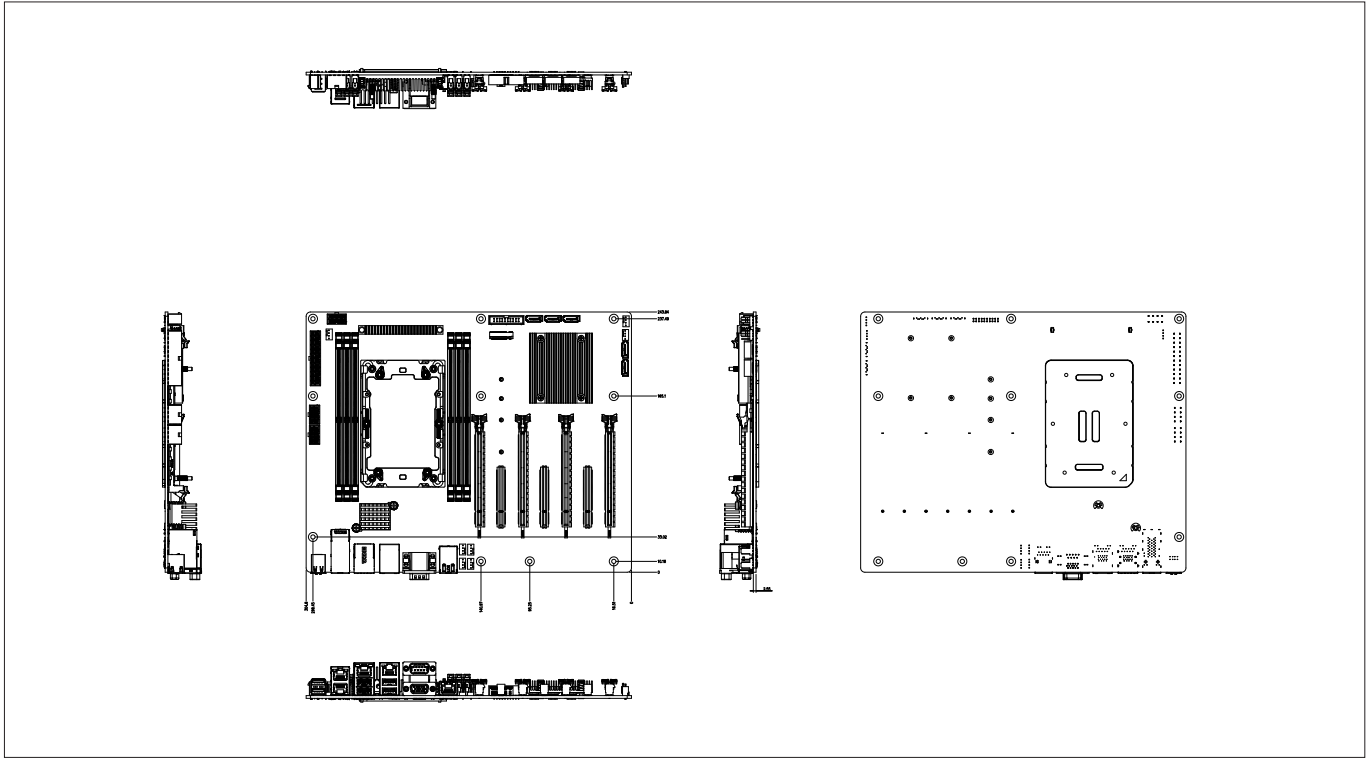

Ordering Information

Model Name	P/N	CPU	Chipset	Memory	PCIe Slot	10GbE/2.5GbE/1GbE	M.2	USB 3.2 Gen2/USB 3.2 Gen1/USB 2.0	TPM 2.0
HPM-ERSUA	HPM-ERSUAA-A1R	1	C741	6	7	2/1/1	1	0/8/2	1
HPM-ERSUA	HPM-ERSUAL-A1R	1	C741	6	7	0/1/1	1	0/8/2	1

Packing List

Item	P/N	Quantity
HPM-ERSUA motherboard	HPM-ERSUAA-A1R	1
HPM-ERSUAA I/O shield	E195BKHPRSUA00R	1
LGA4677 CPU carrier-E1B	E199TR00063R	1


Optional Items

Item	P/N
CPU Cooler for LGA4677 4U 4500RPM 350W	BCC-FAN-467-01R

HPM-ERSUA

Single 4th/5th Generation Intel®Xeon® Scalable Processor ATX Server Board with Intel® C741 Chipset and IPMI2.0. Processor supports up to 270W TDP


Block Diagram

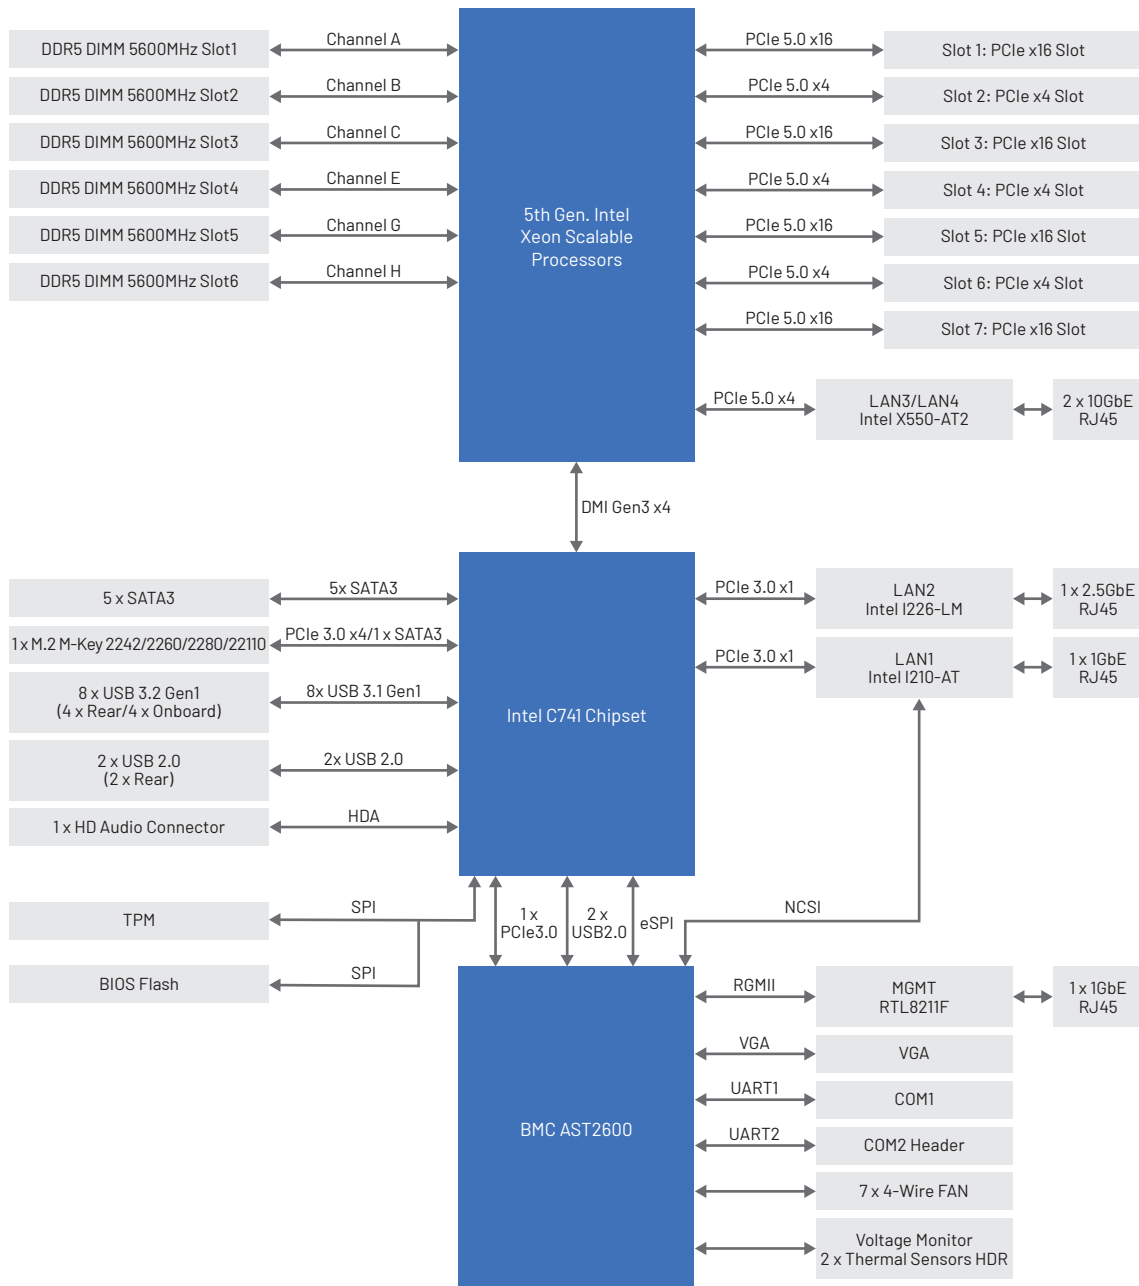

HPM-ERSUA

Single 4th/5th Generation Intel® Xeon® Scalable Processor
 ATX Server Board with Intel® C741 Chipset and IPMI2.0.
 Processor supports up to 270W TDP

I/O Overview

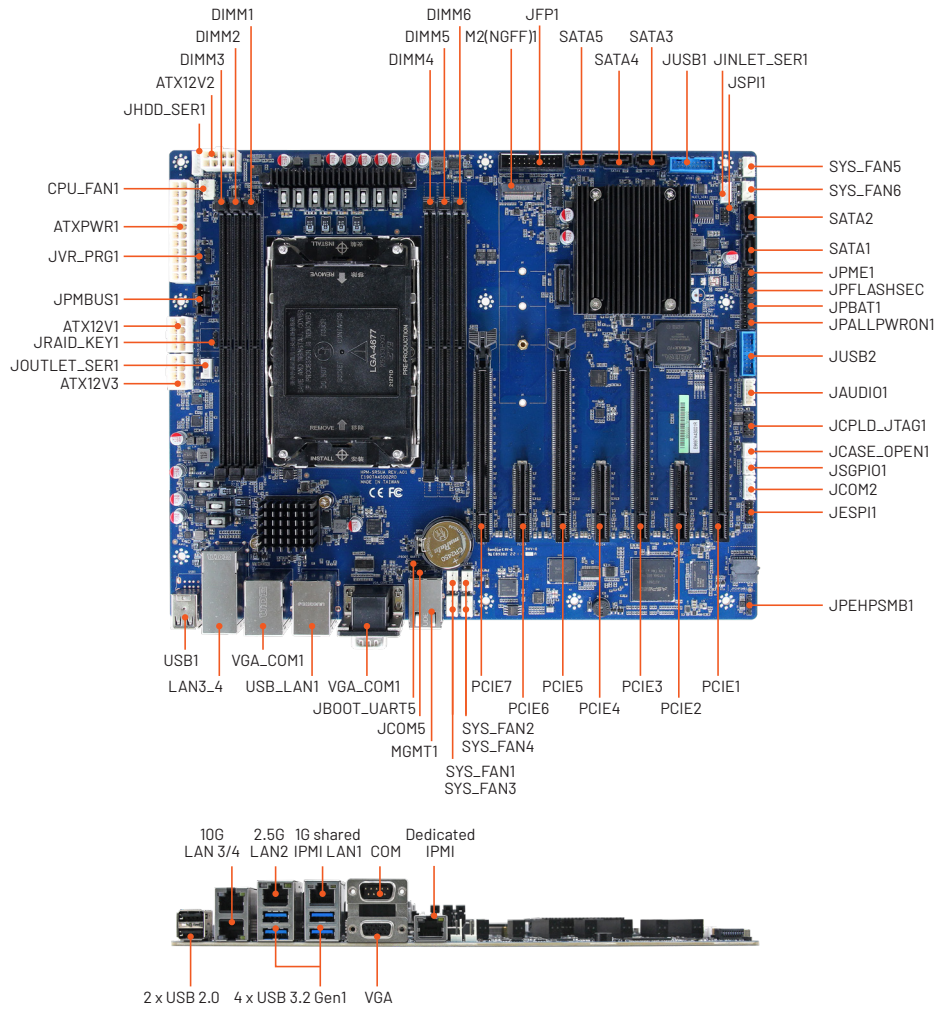

CPU Support List (HPC Only)

SKU	Launch Date	# of Cores	# of Threads	Processor Base Frequency	Max Turbo Frequency	TDP (W)
Intel® Xeon® Gold 6548Y+	Q4,23	32	64	2.5 GHz	4.1 GHz	250
Intel® Xeon® Gold 6526Y	Q4,23	16	32	2.8 GHz	3.9 GHz	195
Intel® Xeon® Gold 5515+	Q4,23	8	16	3.2 GHz	4.1 GHz	165
Intel® Xeon® Gold 6530	Q4,23	32	64	2.1 GHz	4.0 GHz	270
Intel® Xeon® Gold 5520+	Q4,23	28	56	2.2 GHz	4.0 GHz	205
Intel® Xeon® Silver 4516Y+	Q4,23	24	48	2.2 GHz	3.7 GHz	185
Intel® Xeon® Silver 4514Y	Q4,23	16	32	2.0 GHz	3.4 GHz	150
Intel® Xeon® Silver 4510	Q4,23	12	24	2.4 GHz	4.1 GHz	150
Intel® Xeon® Silver 4509Y	Q4,23	8	16	2.6 GHz	4.1 GHz	125
Intel® Xeon® Silver 4510T	Q4,23	12	24	2.0 GHz	3.7 GHz	115
Intel® Xeon® Bronze 3508U	Q4,23	8	8	2.1 GHz	2.2 GHz	125
Intel® Xeon® Gold 6448Y	Q1,23	32	64	2.1 GHz	4.1 GHz	225
Intel® Xeon® Gold 6426Y	Q1,23	16	32	2.5 GHz	4.1 GHz	185
Intel® Xeon® Gold 6418H	Q1,23	24	48	2.1 GHz	4.0 GHz	185
Intel® Xeon® Gold 5415+	Q1,23	8	16	2.9 GHz	4.1 GHz	150
Intel® Xeon® Gold 5420+	Q1,23	28	56	2.0 GHz	4.1 GHz	205
Intel® Xeon® Gold 5418Y	Q1,23	24	48	2.0 GHz	3.8 GHz	185
Intel® Xeon® Silver 4416+	Q1,23	20	40	2.0 GHz	3.9 GHz	165
Intel® Xeon® Silver 4410Y	Q1,23	12	24	2.0 GHz	3.9 GHz	150
Intel® Xeon® Silver 4410T	Q1,23	10	20	2.7 GHz	4.0 GHz	150
Intel® Xeon® Bronze 3408U	Q1,23	8	8	1.8 GHz	1.9 GHz	125
Intel® Xeon® Gold 6430	Q1,23	32	64	2.10 GHz	3.40 GHz	270